



Merkblatt Isolierdorndübel TID



<http://www.toge.de>

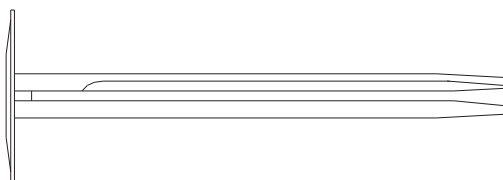

	Bezeichnung <i>description</i>	Länge <i>length</i>	empf. Setztiefe (Beton) <i>rec. setting-depth (concrete)</i>	Max. Befestigungshöhe <i>max. thickn. of comp. to be att. with</i>	Best.Nr. / Order Nr. TID-S	Best.Nr. / Order Nr. TID-R
Alt	TID-. 0 - 1,5 ¹⁾	50mm	35mm	15mm	888 000 015	887 001 015
Neu	TID-. 50		30mm	20mm	031 061 050	031 063 050
Alt	TID-. 0 - 3	80mm	50mm	30mm	888 030 301	888 030 302
Neu	TID-. 80		30mm	50mm	031 061 080	031 063 080
Alt	TID-. 3 - 6	110mm	50mm	60mm	888 033 602	888 033 603
Neu	TID-. 110		35mm	75mm	031 061 110	031 063 110
Alt	TID-. 6 - 9	140mm	50mm	90mm	888 036 903	888 036 904
Neu	TID-. 140		40mm	100mm	031 061 140	031 063 140
Alt	TID-. 9 - 12	170mm	50mm	120mm	888 030 912	888 035 912
Neu	TID-. 170		45mm	125mm	031 061 170	031 063 170
Alt	TID-. 12 - 15	200mm	50mm	150mm	888 031 215	888 035 215
Neu	TID-. 200		50mm	150mm	031 061 200	031 063 200
Alt	TID-. 15 - 20	250mm	50mm	200mm	888 031 520	888 035 520
Neu	TID-. 250		50mm	200mm	031 061 250	031 063 250

	Allgemeines bauaufsichtliches Prüfzeugnis	Feuerwiderstandsdauer
Alt	P-3755/7558-MPA BS	F120
Neu	P-3444/7404-MPA BS	F120

